

GEO-SAT: A new approach for knowledge-based agent decision making[☆]

Thomas C. Henderson^{ID*}, Amelia Lessen, Ishaan Rajan, Tessa Nishida, Kutay Eken, Xiuyi Fan, David Sacharny, Amar Mitiche, Thatcher Geary

University of Utah, School of Computing, Salt Lake City, 84112, UT, USA

ARTICLE INFO

Keywords:

Knowledge representation
Geometric methods
SAT
PSAT

ABSTRACT

Logical agents base their action selection decisions on inferences made over a logical knowledge base. Given a propositional logic knowledge base expressed in Conjunctive Normal Form (CNF; we will refer to a logical well-formed formula in CNF as a *sentence*), the knowledge can be converted into a geometrical format, and subsequent analysis takes place as geometrical operations on the feasible region in that representation. Two geometric representations are presented: the n -dimensional hypercube in Euclidean geometry and the n -dimensional Poincaré disk in non-Euclidean geometry. Based on these representations, two novel methods are proposed to: (1) find SAT solutions for the knowledge base (i.e., a truth assignment to each logical variable which makes the sentence true), and (2) find a reasonable approximation to the atom probabilities given the current set of information. This allows agents to determine the semantics (truth) of the world as well as to estimate the probability of truth. The geometric method provides an efficient heuristic approach to solving SAT for CNF knowledge bases, and provides polynomial-time solutions of probabilistic SAT (PSAT) for independent variables, and good PSAT estimates for non-independent logical variables. The polynomial time result for PSAT is due to the fact that the feasible region for the logical sentence is found using convex linear programming, and any point in the feasible region provides a set of valid atom probabilities. From these, if the variables are independent, any complete conjunction is defined as the product of literal probabilities. There is still no reduction of SAT to a geometric problem with a polynomial time solution; this approach to solving SAT and PSAT is called GEO-SAT.

1. Introduction and background

Given a propositional calculus knowledge base represented in CNF, an agent can find out information about the world by finding new sentences that are entailed by the current knowledge. In this way, an agent can determine proper actions. To do so, it may be useful to determine whether the sentence has a solution (satisfiable) or not (unsatisfiable). This is called the SAT problem (for SATisfiability). The SAT problem is NP complete [1]. The geometric approach offers some advantages. The feasible region can be found in polynomial time, and every point in this region provides a valid set of atom probabilities that satisfy the logical constraints. This is used to find atom probabilities that an agent can use in decision making. Other methods provide approximations to these, but cannot guarantee validity (e.g., make minimal entropy solutions). More broadly, the geometric approach proposed here offers a different perspective on the problem and may allow reducing the problem to polynomial time complexity by, e.g., using projection operations, etc.

Another aspect of interest to the agent is the probability that a specific atom (logical variable) is true in a dynamic knowledge base.

First, define a complete conjunction as an assignment of truth values to all the variables, and the complete conjunction set is the set of 2^n complete conjunctions. Then if the sentence $S = A \vee B$ is determined to be true for logical variables A and B , i.e., the probability of $Pr(S) = 1$, then the probability of complete conjunction $(0, 0)$ is 0, while for the three solutions, $(0, 1)$, $(1, 0)$, $(1, 1)$, which satisfy S , and assuming equal likelihood for all solutions, the probability of A is $2/3$, and the probability of B is $2/3$. Note that this is the mean of the complete conjunctions which satisfy the sentence. One way to determine the atom probabilities is to solve the *Probabilistic SAT* (PSAT) problem when each conjunct, C_i , is given a probability, p_i [2,3]. That is, given n logical variables, there are 2^n unique truth assignments (called complete conjunctions) to the variables. The set of complete conjunctions is called Ω , and ω_i is the complete conjunction with binary assignments corresponding to the binary representation of $i - 1$; e.g., ω_1 is all zero assignments to the variables. The PSAT problem consists of determining a probability distribution, $\pi : \Omega \rightarrow [0, 1]$ such that $\sum_{i=1}^{2^n} \pi(\omega_i) = 1$, and $\sum_{\omega_i \models C_j} \pi(\omega_i) = p_j$, for all conjunct probabilities, p_i , where

[☆] This article is part of a Special issue entitled: 'IAS18-2023' published in Robotics and Autonomous Systems.

* Corresponding author.

E-mail address: tch@cs.utah.edu (T.C. Henderson).

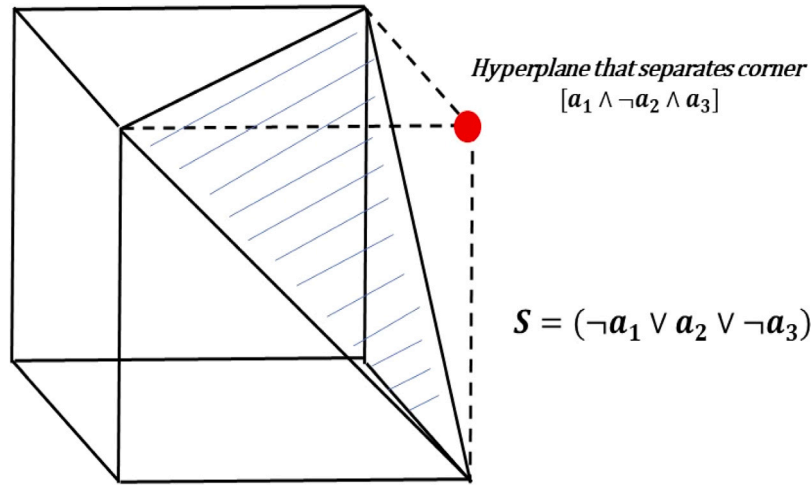


Fig. 1. Example of Chopping $[1; 0; 1]$ from H_3 . The chopping hyperplane goes through the neighbors of $[1, 0, 1]$.

$\sum_{\omega_i \models C_j} \pi(\omega_i) = p_j$ means the sum of the probabilities of the complete conjunctions that entail the clause C_j equals the probability of C_j . The probability of an atom is then found as $Prob(A) = \sum_{\omega_i \models A} \pi(\omega_i)$. We have also previously described how to solve the Probabilistic Sentence Satisfiability Problem (PSSAT) [4] which in certain cases provides a PSAT solution (i.e., given independent variables). The methods we are proposing differ significantly from standard methods in that we solve linear or nonlinear systems of equations rather than having to consider the full joint probability distribution over the variables (e.g., like Bayesian networks [5] or Markov Logic Networks [6]).

The purpose of this study is to investigate extending *Chop-SAT* [7,8] as an alternative way to answer these questions about SAT and PSAT [7,8]. Work on the use of cutting planes started with Gomory [9] who sought integer solutions for linear programs. Given the semantics of the literals in a disjunction, then a linear inequality can be formed summing x_i for atoms in the clause (i.e., a disjunction) and $(1 - x_i)$ for negated atoms in the clause and setting this to be greater than or equal to 1. Next, a $\{0, 1\}$ solution is sought resulting in an integer linear programming problem. If a non- $\{0, 1\}$ solution is found, Gomory proposed a way to separate (via a *cutting plane*) that solution from all integer solutions. This method has been used in finding lower complexity ways to provide theorems for proving the boundedness of polytopes, cutting plane proofs for unsatisfiable sentences, pseudo-Boolean optimization, etc. (see [10–14]). The *Chop-SAT* method was discovered independently and is based on a different set of insights into the nature of the CNF structure.

Based on the *Chop-SAT* approach, the contributions of the present study are to provide [15]:

1. A method to determine whether a SAT solution exists, and
2. A method to determine an approximation to the atom probabilities.

Next, we describe *Chop-SAT* in its relevant details.

2. Chop-SAT

A sentence is the conjunction of a set of disjunctions where each disjunction is a literal (i.e., either an atom or the negation of an atom). A sentence is then represented as $S = C_1 \wedge C_2 \wedge \dots \wedge C_m$, where $C_i = L_{i,1} \vee L_{i,2} \vee \dots \vee L_{i,k_i}$ where $L_{i,j} = a_p$ or $L_{i,j} = \neg a_p$, and a_p is an atom.

The satisfiability of a sentence, S , over n variables can be converted to a geometric problem as follows. Consider the unit hypercube of dimension n centered at $[\frac{1}{2}, \frac{1}{2}, \dots, \frac{1}{2}]$; call it H_n . Then each vertex of H_n represents a complete conjunction for n variables. The vertexes also

represent assignments of probability 0 or 1 for the truth of each variable. Every other point in H_n can be considered to give a probability on the interval $[0, 1]$ for each variable. E.g., the center of H_n represents a probability assignment of $1/2$ for each atom.

Next, consider a clause, C_i , of S with k_i literals. Since it is a disjunction, there is only one truth assignment over its literals which makes it false: namely, where the atom of each literal is assigned the value which makes the literal false. However, every atom not represented by a literal in C_i can take on either truth value and not change the truth of the clause. Thus, there is a sub-hypercube of dimension $n - k_i$, that is, a shifted, scaled instance of H_{n-k_i} , whose vertexes are not solutions for S . It turns out that there is an $(n-1)$ -dimensional hyperplane which can be constructed so as to separate solutions from these non-solutions for C_i . This chopping hyperplane can be positioned anywhere along the edges connecting H_{n-k_i} to the rest of H_n . Fig. 1 shows an example of chopping one vertex, $[1, 0, 1]$, from H_3 . The chop corresponds to finding the intersection of H_n with the set of points in the non-negative half-space defined by the hyperplane. Each conjunct provides a corresponding half-space, and the set of all half-spaces, along with H_n are intersected to produce the feasible region for solutions.

Once all the chops are made (i.e., the intersection of H_n with the non-negative half-spaces defined by the hyperplanes), the resulting convex set is called the *feasible region*. Note that it is necessary to include hyperplanes which define the faces of H_n in order to keep the feasible region bounded. Fig. 2 shows a simple 2-D example of the feasible region resulting from chopping off each corner.

Define removing an i -dimensional sub-hypercube as an H_i -cut (e., cutting a vertex is an H_0 -cut, cutting an edge is an H_1 -cut, etc.) The hyperplanes in this case are lines in 2-D. Each row provides the coefficients a, b, c of the standard form equation of a line: $ax + by + c = 0$: where the first four are the H_0 -cuts, and the last four define the faces (sides) of the square. The chops are made at the vertexes of the non-cut neighbors of the sub-hypercube being removed.

-0.7071	-0.7071	1.0607
-0.7071	0.7071	0.3536
0.7071	-0.7071	0.3536
0.7071	0.7071	-0.3536
1.0000	0	0
-1.0000	0	1.0000
0	1.0000	0
0	-1.0000	1.0000

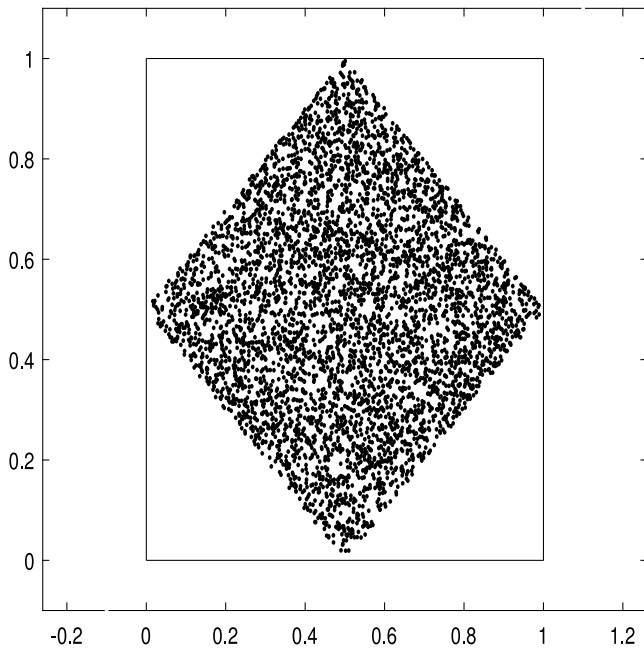


Fig. 2. Example 2-D Feasible Region Resulting from Chopping all Corners of H_2 .

3. Solving SAT

Given a feasible region, F , corresponding to a sentence (or knowledge base), it is possible to probe that region to determine if there is a SAT solution (i.e., a corner of H_n in F). Note that the feasible region for any unsatisfiable sentence has no point farther than $\frac{\sqrt{n-2}}{2}$ from the center of H_n . This is due to the fact that the sentence consisting of 2^n single H_0 -cuts produces a feasible region, I_n , which contains the feasible region produced by any other unsatisfiable sentence, and the most distance points from the center of I_n are the centers of the 2-D faces of H_n which are at distance $\frac{\sqrt{n-2}}{2}$.

Our approach takes advantage of the fact that the Maximal Volume Inscribed Ellipsoid (MVE) of a full-dimensional convex polytope defined by a finite set of affine inequalities can be found in polynomial time [16], and the MVE will, in general, have its major semi-axes aligned with the most elongated parts of F . The ellipsoid representation consists of x and E , where x is the center of the ellipsoid and E is the matrix such that the points, P , of the ellipsoid are defined as:

$$P = \{x + Es | s \in \mathbb{R}^n \ni \|s\| \leq 1\}$$

That is, the points of the ellipsoid are found by mapping the points, s , of the hypersphere in $n - D$ through the linear transform $x + Es$. The Singular Value Decomposition of E yields the semi-major axes of the MVE. In order to increase the volume, it is possible to move the hypercube face constraints outward to allow a larger volume for the ellipsoid. Fig. 3 demonstrates this idea in 2-D where there is just one solution $\{[0;0]\}$, and the sides of the square have been moved out 10 units.

To test the practicality of this approach, the following experiment was performed:

- A set of 1000 random knowledge bases over 20 variables was generated.
- The corresponding feasible region was determined for each KB.
- The MVE was found for each feasible region.
- The major semi-axes were found.
- The feasible region boundary points along both directions of the major semi-axes were found.

- If any point was greater than $\frac{\sqrt{n-2}}{2}$ away from the center, then a solution is known to exist.

A solution was found in this way for every knowledge base. Note that this is only a heuristic and is not guaranteed to find a solution. If the Minimal Volume Circumscribing ellipsoid were found instead, then this would guarantee a solution, but this problem is NP hard [17].

To see how *Chop-SAT* relates to standard SAT solvers, consider DPLL. DPLL is a complete backtracking search algorithm which as its major step assigns a value to a variable, then determines if there is a solution (i.e., it reduces the conjuncts, assigns necessary values to resulting unit clause variables, and assigns values to pure variables with only one polarity across all conjuncts). *Chop-SAT* can be viewed as an alternative geometric approach to this solution determination step only with no need, in general, to be embedded in a complete search for PSAT solutions; to solve SAT would require a complete search.

Chop-SAT represents the SAT problem as a convex feasible region where if this region has a corner from the original n -D hypercube, then a solution exists; if not, then the sentence is unsatisfiable. *Chop-SAT* works by using linear programming (linprog in Matlab) to find extremal vertexes by projecting the feasible region onto a selected vector. Let F be the feasible region of a sentence; then linear programming finds $x \in F$ which minimizes $f^T x$ such that $Ax \leq b$ and $lb \leq x \leq ub$, where $lb = 0$ and $ub = 1$.

For example, if $f = [1, 0, 0]^T$ then the feasible region is projected onto the x -axis (in 3-D). Of course, *Chop-SAT* when embedded in a search algorithm like DDLL is also complete, but we use it as a one-step algorithm since this usually finds a solution. Note that we can also make *Chop-SAT* complete by projecting onto all the diagonal axes of the n -D hypercube, but our original hope was that geometry would provide a polynomial time solution. *Chop-SAT* can determine that a feasible region is from an unsatisfiable sentence because of the following property: For every feasible region arising from an unsatisfiable sentence, there is no point at distance greater than $\frac{\sqrt{n-1}}{2}$ from the center of the hypercube; this means the feasible region can undergo any rotation about the center of the hypercube and all points of the feasible region remain within the bounds of the n -D hypercube - “this is not the case for feasible regions containing solutions.

4. Solving for atom probabilities

Another important problem for an agent is to compute the probability of achieving a particular state from a virtual world. For example, in the Wumpus World, the agent will die if it enters a cell with a pit. Here we describe a method to determine such probabilities using the feasible region arising from a sentence knowledge base.

For any given satisfiable knowledge base, the atom probabilities are just the average of the 0/1 truth assignments of the complete conjunctions which satisfy the sentence. However, since it is too computationally costly to determine all possible solutions and take their average, we propose the following approximations that can be found within a feasible region F :

- the analytic center of F .
- the p-center of F .
- the center of the MVE.
- mean of samples from F .

Analytic Center of F

The analytic center of F is defined as:

$$c = \max_y \prod_h (a_h \cdot \begin{bmatrix} y \\ 1 \end{bmatrix})$$

where $y \in F$ and a_h is the hyperplane coefficient vector for hyperplane h .

P-Center of F

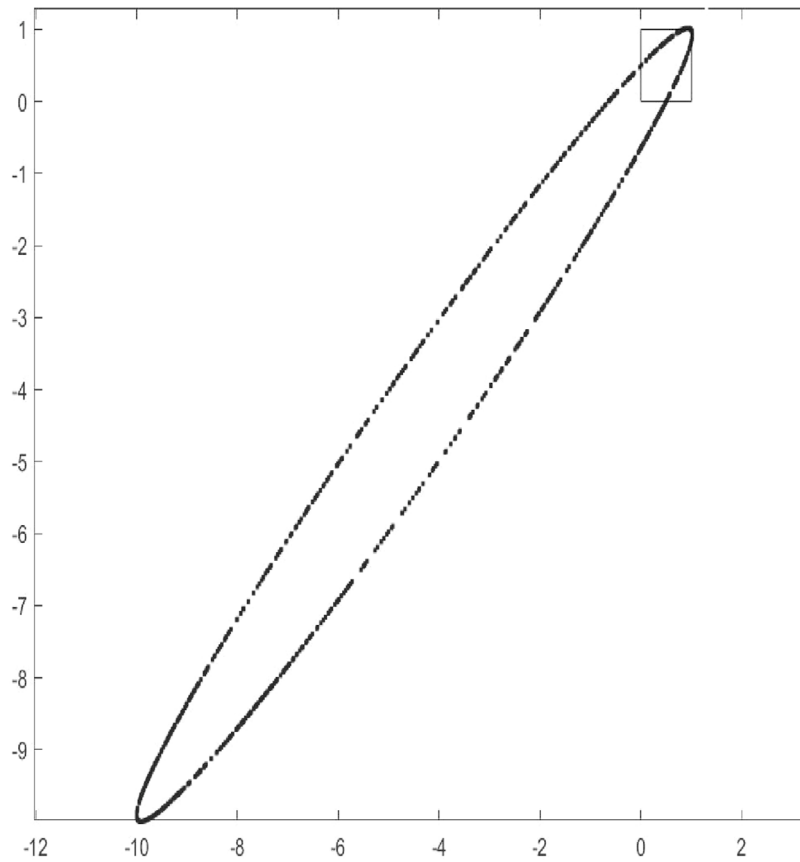


Fig. 3. Example 2-D MVE Showing Major Semi-Axis in Direction of Solution.

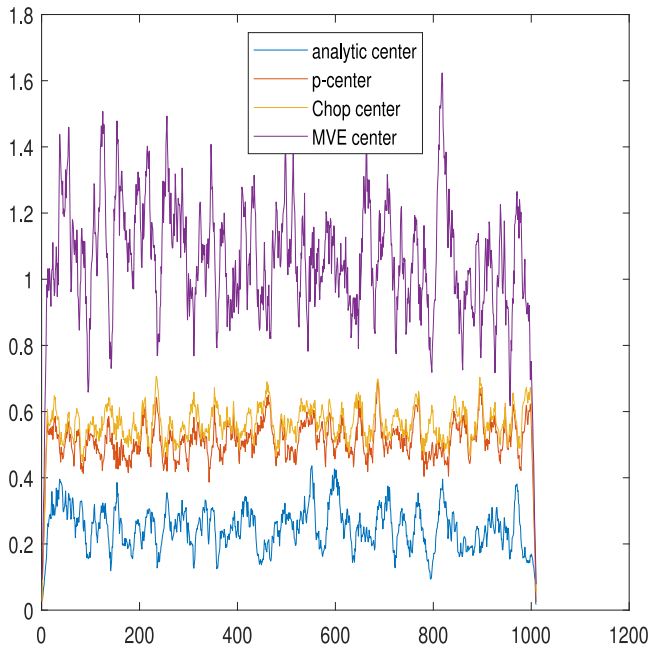


Fig. 4. Error of Approximation Methods: Analytic Center (blue), P-Center (red), Chop center (mustard), MVE center (purple). (For interpretation of the references to color in this figure legend, the reader is referred to the web version of this article.)

The p-center of the feasible region is defined as follows [18]: (1) choose an initial point $x \in F$; (2) for each hyperplane constraint find

the line normal to the hyperplane which goes through x ; (3) find the two most distant points in F on this line; (4) Average all the points found this way and assign the value to x ; (5) stop if x does not change significantly.

Chop-SAT Mean Center of F

In this approach, a number of samples are found in the feasible region and their average determined. For example, solve the following:

$$\min_x f^T x$$

such that $x \in F$ and f is taken as the positive and negative unit vector along each axis of the n-D space.

MVE Center of F

The MVE provides both the center of the MVE as well as the directions of the semi-axes. Here, the center of the MVE is used to approximate the atom probabilities.

4.1. Experimental study

For this study, 1000 random knowledge bases were generated with 5 atoms, a maximum of 10 clauses, and at most three literals in a clause. Fig. 4 shows the Euclidean distance between the atom probability vector and the four proposed approximations: (1) the analytic center (has lowest error), (2) the p-center (next lowest error), (3) the Chop mean center (similar to p-center error), and (4) the MVE center (exhibits the highest level of error). The center errors over all trials was 0.25, 0.52, 0.57, and 1.07, respectively.

Fig. 5 shows how the centers cluster. Since the vectors are all 5-dimensional, they are converted to a 2-dimensional representation which maintains spatial coherence. As can be seen, the analytic centers spread similarly to the actual atom probabilities, the MVE centers form a tight central cluster, the p-centers skew somewhat away (up) from the

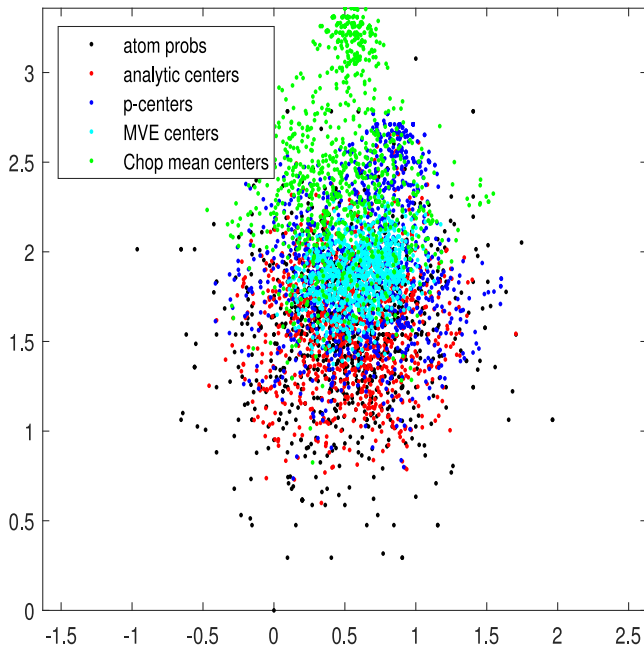


Fig. 5. The center distributions.

actual atom probabilities, while the Chop mean centers skew a good bit away from the actual probabilities.

The experiments indicate that the Analytic Center is the best approximation to the actual atom probabilities.

5. Wumpus World experiment

To demonstrate the effectiveness of this approach on a 100-variable problem, agent decision making was tested in the Wumpus World framework. Wumpus World was proposed by Yob [19], and has been used as a standard agent testbed for some time [20]. Wumpus world here is a 4×4 grid of cells; each cell may contain a pit with 20% probability, and if there is a pit it is the only thing in the cell. One cell contains some gold, and one cell contains a Wumpus (the gold may be co-located with the Wumpus). An agent starts in cell (1, 1) and explores the grid in order to find the gold. Each cell neighboring a pit has a breeze, and each cell neighboring the Wumpus has a stench. Fig. 6 shows an example board with the agent in cell (1, 1) with direction $\theta = 0$, with pits in cells $\{(1, 4), (4, 2), (4, 3)\}$, the Wumpus in cell (2, 3), and the gold in cell (4, 4).

The agent has a set of percepts in a cell (represented as bits): (1) stench, (2) breeze, (3) glitter, (4) bump, and (5) scream. The glitter percept lets the agent know it is in the cell with the gold. The agent has a state (x, y, θ) , where (x, y) is its location in the grid, and θ is its orientation $\theta \in \{0, 90, 180, 270\}$ degrees. The agent has a set of possible actions: (1) rotate left, (2) rotate right, (3) forward, (4) grab, (5) shoot, and (6) climb. If the agent moves into a cell with a pit or the Wumpus, it dies. The agent has one arrow and can shoot the Wumpus.

The agents here all share a Belief, Desire, Intention cognitive architecture [21]. The Belief-Desire-Intention architecture is a hierarchical organization of states and actions (grouped into plans) that was designed specifically for agents. The architecture not only defines the conceptual structure of a program, but also a process structure that enables dynamic planning. Organizing the program in this way supports both reasoning by the autonomous agent as well as reasoning by human operators. The structure of desires, intentions, beliefs, and plans coincides well with the reasoning of the human operator. For example, a human observer could ask a BDI agent directly, “What is your current

Table 1

Results of Wumpus world experiment.

Solver type	Mean success	Variance	CI Low	CI High
Human Code	117.00	141.50	107.25	126.75
Analytic Center	122.20	75.20	115.09	129.31
Chop-SAT	124.20	61.70	117.76	130.64
Monte Carlo	125.4	91.30	117.57	133.23

plan?” and the agent could respond “Located the Wumpus and proceeding to kill it”.

In the specific scenario here, the desires are: (1) escape, (2) kill the Wumpus, and (3) explore. If it has the gold, its intention will be to escape with the gold. The agent’s intention will be to kill the Wumpus if its location is known. Otherwise, its intention is to explore the grid. In order to explore, the agent selects the lowest probability risk unvisited cell. All agents have the same BDI architecture and only differ in how they compute the probabilities for risk: (1) a human produced algorithm to assign pit and Wumpus probabilities, (2) the analytic center, (3) *Chop-SAT* mean, and (4) Monte Carlo simulation based on statistics over sample boards satisfying the known percept information.

The experimental method is to run 5 trials of 200 randomly generated Wumpus boards and compute statistics on the number of successes for the 5 trials. That is, the means, variances and 95% confidence intervals are given below. Note that the Monte Carlo results will be very close to optimal and serves as the upper bound on success. The results are given in Table 1. As can be seen, the *Chop-SAT* based agent performed the almost as well as Monte Carlo and better than the human and analytic center methods.

These experiments from Wumpus world have 80 logical variables (i.e., 2^{80} complete conjunctions for the knowledge base!). The point is to see if the probabilistic method provides adequate variable probabilities to help make good (life preserving) decisions. The baseline of the experiment is given as the Monte Carlo method for determining these probabilities (i.e., random boards are generated that satisfy the knowledge acquired during a game and the exact variable probabilities are estimated from these board configurations). The overall statistic is that 1000 random Wumpus boards are generated, and each algorithm (human, analytic center, *Chop-SAT*) is compared to the ground truth approximated by the Monte Carlo method. Thus, there are three solvers (humans wrote programs to assign probabilities, the analytic center method provides probabilities, and *Chop-SAT* provides probabilities) which are then used to make decisions. Other probabilistic SAT solution methods were not used because they are all exponential complexity and either won’t run on this size problem or require max entropy type assumptions which are not valid here.

A current application under study is the use *Chop-SAT* as part of a Belief-Desire-Intention architecture for autonomous Unmanned Aircraft Systems (UAS) agents [22]. We are conducting experiments this summer at the US Air Force Academy where such an architecture for decision making is used.

6. SAT solver experiments

One hundred random CNF sentences were generated, each with 1000 variables and 6000 clauses using the *k-SAT* method:

- Set number of variables to $n = 1000$ and number of clauses to $m = 6000$.
- The minimum number of literals in a clause is 2, and maximum number of literals in a clause is 1000. The probability of negating a variable is 0.5.
- The satisfiability ratio $\alpha = \frac{m}{n} = 6$.

Step 1

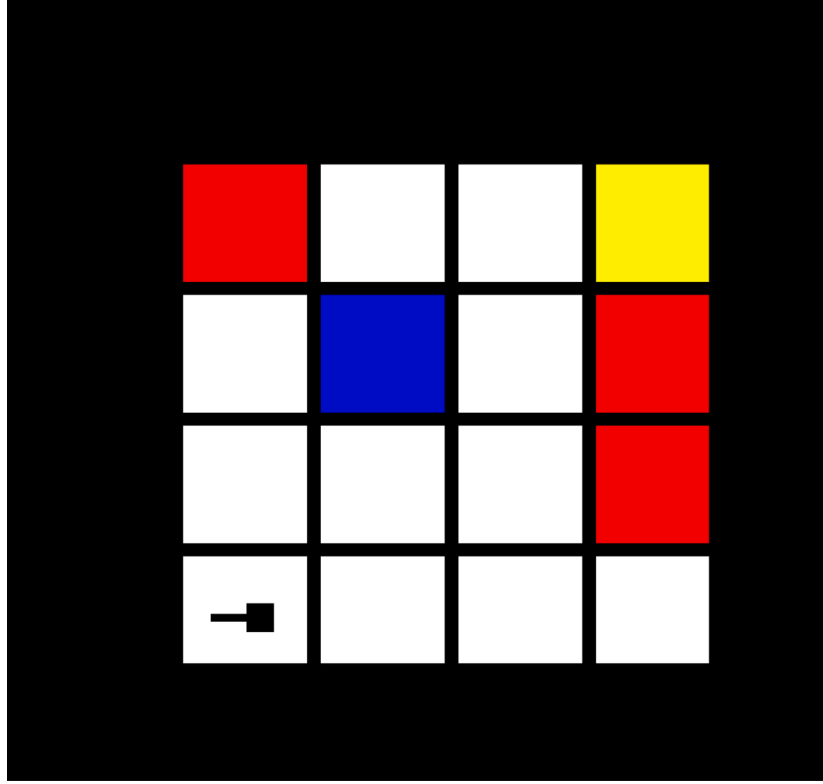


Fig. 6. An Example Wumpus World Board.

The Chop-SAT method solved all 100 in reasonable time on a ThinkPad laptop. A standard SAT solver (cryptominisat5) found the same solutions for these sentences. We intend to explore larger problems in future work, but this is strong preliminary evidence of the efficacy of the Chop-SAT method. Also, note that Chop-SAT does not require a 3SAT format which reduces setup cost.

7. Non-Euclidean geometry approach

The Euclidean method described above shows how each disjunction in the sentence gives rise to a hyperplane which separates the non-solution vertexes (on the negative side of the hyperplane) of H_n from the solution vertexes (on the non-negative side of the hyperplane); i.e., the intersection of the non-negative half-spaces of these hyperplanes results in a convex feasible region which must contain any solution which exists. The non-Euclidean method projects H_n onto the n -dimensional unit hypersphere considered as an n -dimensional Poincaré Disk (see [15]). The advantage of this approach is that the vertexes of H_n are mapped onto the surface of the disk and are thus at infinite distance (in terms of hyperbolic geometry) from the center of the disk. The idea is that this property makes the solutions more readily identifiable.

The motivation for using non-Euclidean geometry is that it allows us to put the solutions at a unique location: at infinite distance from the origin in terms of non-Euclidean distance). That is, SAT is mapped onto the Poincaré Disk as follows (see Fig. 7). The corners of the n -dimensional hypercube are projected onto the n -dimensional hypersphere, D_n , as ideal points (i.e., points on the surface of the hypersphere — note that these are not points in the Poincaré Disk). These ideal points are at infinite distance from the center of the unit hypersphere. Unlike in Euclidean geometry where the hyperplane chops usually produce a bounded convex polytope for the feasible region whether or

not a solution exists, in the case of the Poincaré Disk representation, the feasible region is only bounded when no solution is in the feasible region. Given this fact, the goal is to find low-complexity algorithms to determine whether or not there exists a sequence of points in the feasible region such that in the limit their distance from the origin is infinite (in hyperbolic geometry).

The goal is to provide a representation in terms of the Poincaré Disk which allows the solution vertexes to be found through efficient geometric algorithms. To set up this representation, a few basic facts concerning the Poincaré Disk geometry must be defined.

7.1. Poincaré Disk distance

Consider the 2-dimensional Poincaré Disk (Fig. 8, upper left circle). The distance between two points, p and q , in the Poincaré Disk is defined in terms of Euclidean distance on points given as complex numbers:

$$d(p, q) = \ln \left(\frac{|ap||qb|}{|aq||pb|} \right)$$

where a and b are the intersection points with the unit circle of the unique circle (Fig. 8, lower right circle) through p and q which is orthogonal to the unit circle. Moreover, the points are arranged in the order a, p, q and b along the circle. An alternative formulation which does not require the orthogonal circle is given by:

$$d(p, q) = \operatorname{acosh} \left(1 + \frac{2|pq|^2|r|^2}{(|r|^2 - |op|^2)(|r|^2 - |oq|^2)} \right)$$

where $r = 1$ for the unit disk, and $|op|$ and $|oq|$ are the Euclidean distances of p and q from the origin, respectively.

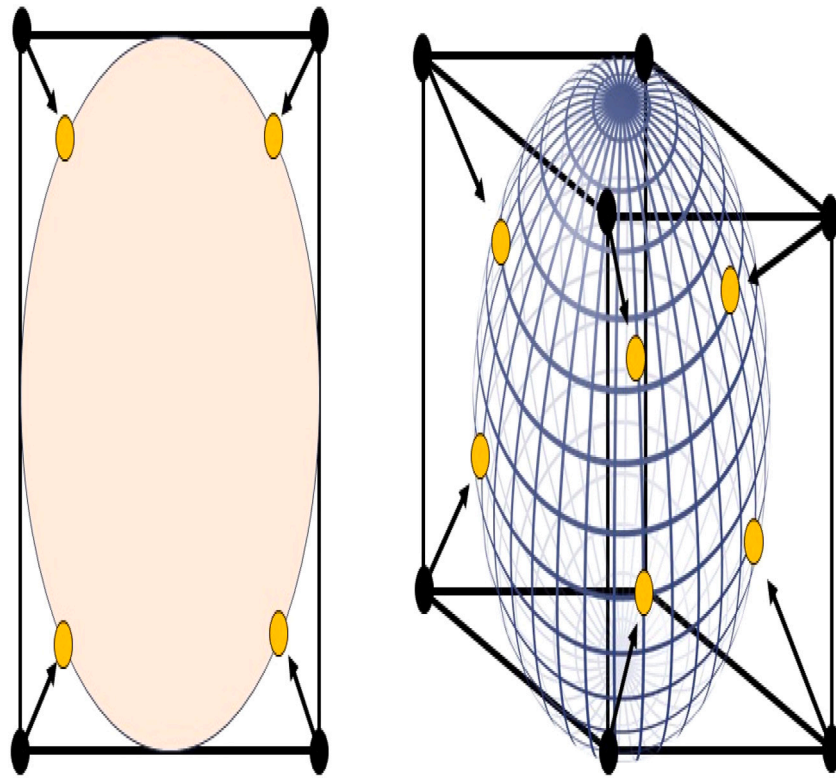


Fig. 7. The Vertexes of the Hypercube are Projected onto the Hypersphere.

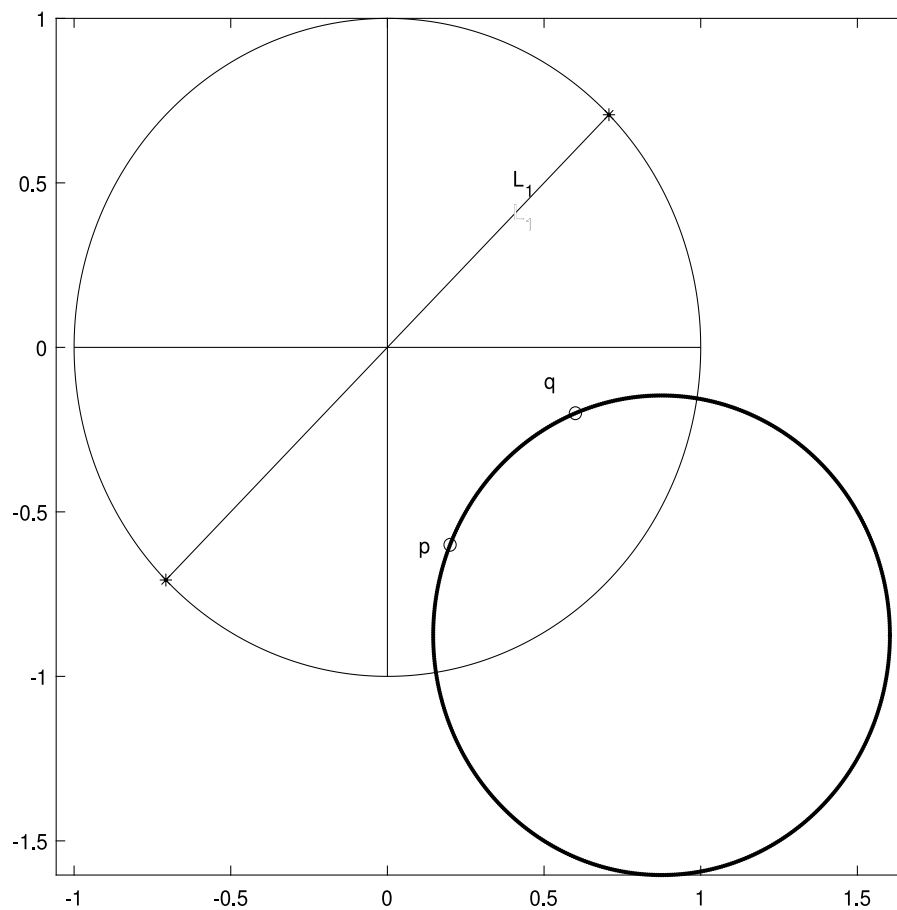


Fig. 8. The 2D Poincaré Disk; L_1 is a line through the center, $\mathcal{O} = (0,0)$, i.e., a diameter; L_2 is a circular arc which is orthogonal to the unit circle.

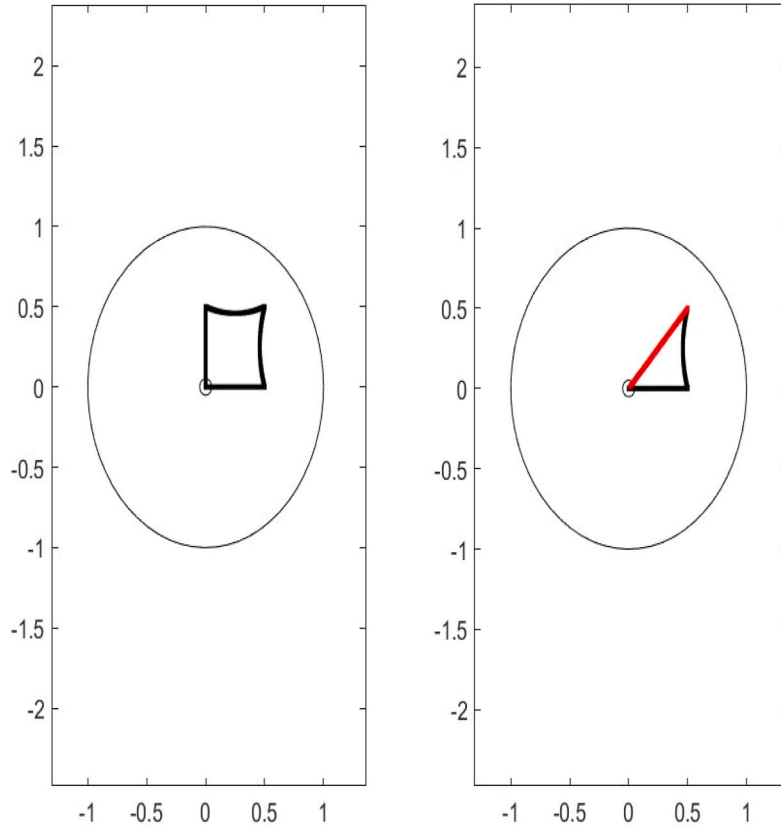


Fig. 9. Representing the Complete Feasible Region as a Square in the Poincaré Disk. The left side is the complete feasible region, while the right side shows the feasible region when $(0, 1)$ is not a truth assignment that satisfies the sentence.

7.2. The orthogonal circle through two points

The angle between two circles (defined in Euclidean coordinates) is given by:

$$\cos(\theta) = \frac{r_1^2 + r_2^2 - \|C_1 - C_2\|^2}{2r_1r_2}$$

where r_1 is the radius of the first circle, r_2 the radius of the second circle, and C_1 and C_2 are the centers of the two circles. Two circles are said to be orthogonal if $\theta = \frac{\pi}{2}$.

Given two points, p and q , in the Poincaré Disk, the straight line (in hyperbolic terms) through them can be found as follows. If p and q lie on a diameter of the Poincaré Disk, then the line is just the straight Euclidean line through the two points. This can be viewed as a circle of infinite radius through the two points. If p and q do not lie on a diameter line, then there are two circles to consider: the unit disk with $r_1 = 1$ and $C_1 = (0, 0)$, and the circle through p and q with radius r_2 and center $C_2 = (C_x, C_y)$. Since the circles are orthogonal:

$$\cos(\theta) = \cos\left(\frac{\pi}{2}\right) = 0$$

$$\Rightarrow 0 = 1 + r_2^2 - \|C_2\|^2$$

$$\Rightarrow r_2^2 = C_x^2 + C_y^2 - 1$$

Each point, p and q , gives rise to another equation; e.g., for p :

$$r_2^2 = (p_x - C_x)^2 + (p_y - C_y)^2$$

$$\Rightarrow r_2^2 = p_x^2 - 2p_xC_x + C_x^2 + p_y^2 - 2p_yC_y + C_y^2$$

and substituting the first into the second:

$$C_x^2 + C_y^2 - 1 = C_x^2 + C_y^2 - 2p_xC_x - 2p_yC_y + p_x^2 + p_y^2$$

$$\Rightarrow p_xC_x + p_yC_y = \frac{p_x^2 + p_y^2 + 1}{2}$$

Likewise:

$$\Rightarrow q_xC_x + q_yC_y = \frac{q_x^2 + q_y^2 + 1}{2}$$

This can be solved as a linear system: $A = \begin{bmatrix} p_x & p_y \\ q_x & q_y \end{bmatrix}$ $b = \begin{bmatrix} \frac{p_x^2 + p_y^2 + 1}{2} \\ \frac{q_x^2 + q_y^2 + 1}{2} \end{bmatrix}$ and

solving for the center, C :

$$AC = b$$

Finally, the radius is found as follows:

$$r = \|C - p\|$$

7.3. Representation of bounding faces in the Poincaré Disk

In Euclidean geometry, the SAT problem is posed in terms of removing vertexes from the hypercube. Each conjunct in the sentence provides a hyperplane which divides the feasible region from the non-satisfying solutions for that conjunct. However, in the Poincaré Disk, a way must be found to represent the original complete set of vertexes, and then some way to chop non-solutions from the feasible region. One way to go at this is to use a square like the one shown in Fig. 9. The problem arises that this is likely to suffer from the same problem as the Euclidean representation, namely that a projection does not readily reveal solution corners.

Another representation that may allow lower complexity discovery of whether a solution exists or not is given by the feasible region shown in Fig. 10. For example, vertexes which satisfy the sentence will all be infinitely far from the origin, and perhaps there is a polynomial method to determine if any such point exists. The $2n(n-1)$ -dimensional

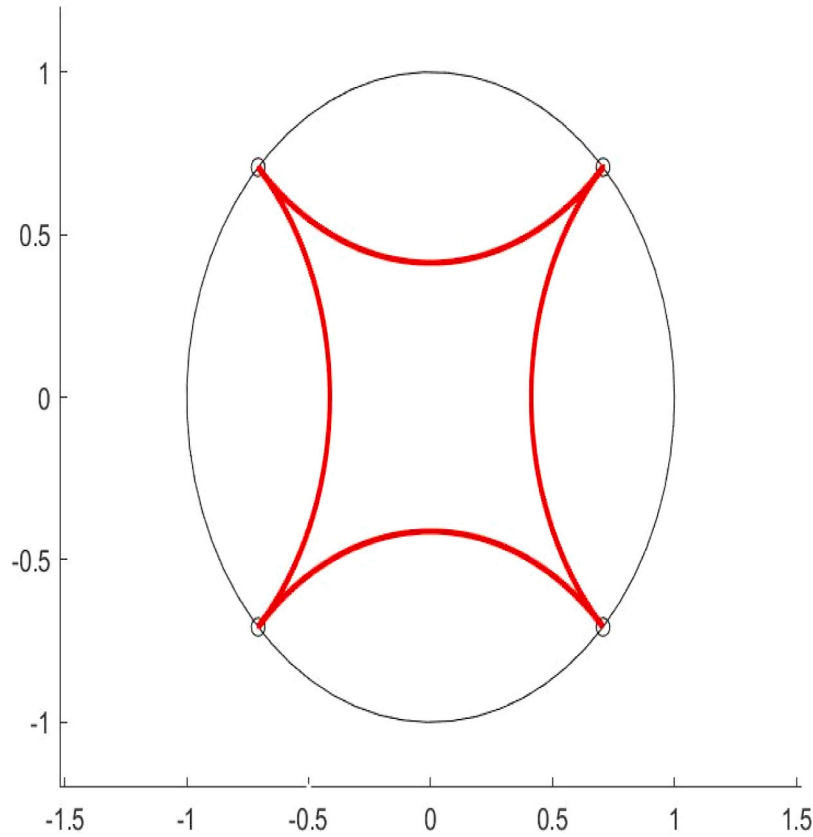


Fig. 10. Representing the Complete Feasible Region as a Square with corners at infinity in the Poincaré Disk.

bounding faces of the hypercube are represented in the Poincaré Disk in terms of hyperspheres through the corresponding face vertexes. The centers of these hyperspheres will lie along the coordinate axes (one each in the positive and negative directions). Let v_1 be the unit vector from the center of D_n to a vertex of the face, and v_2 be the unit vector in the desired axis direction. We seek the center, C and radius r of the hypersphere through the face vertexes. Given that the desired hypersphere is orthogonal to the unit disk, then the angle, θ , between v_1 and v_2 is given by:

$$\theta = \text{acos}(v_1 \cdot v_2)$$

which means that the distance, xd , along the axis from the origin to C is:

$$xd = \frac{1}{\cos(\theta)}$$

which gives C . This process is done for the $2n$ bounding face constraints on the feasible region.

7.3.1. Clause chops

As has been described, *lines* in the Poincaré Disk are circular arcs when viewed in Euclidean geometry, and this allows non-solution vertexes to be separated from the feasible region by choosing the appropriate side of the circle which defines the chop. What is required is an algorithm to convert from a disjunction to the equation of a circle which has the non-solutions on one side and the remaining possible solutions on the other. This algorithm is provided below.

Given clause:

$$C = L_1 \vee L_2 \vee \dots \vee L_k$$

convert to $V = [v_1, v_2, \dots, v_n]$ where n is the number of atoms, and a_i is the i th atom:

$$v_i = -1 \text{ if } \exists j \ni \neg a_i = L_j$$

$$v_i = 0 \text{ if } \text{no literal of } a_i \in C$$

$$v_i = 1 \text{ if } \exists j \ni a_i = L_j$$

Let $\alpha = -V$ and $u_\alpha = \frac{\alpha}{\|\alpha\|}$. Obtain an H_n vertex to be chopped by substituting -1 for 0 's, if any, in α : $\text{chop_pt} = \alpha_{-1 \rightarrow 0}$.

Obtain a non-chopped neighbor, nei_pt , by inverting a non-zero element of chop_pt .

Obtain the projection point by sliding along an H_n edge connecting the chop_pt to the nei_pt by the desired percentage amount $\Delta \in (0, 1]$; that is:

$$\text{proj_pt} = (1 - \Delta)\text{chop_pt} + \Delta\text{nei_pt}$$

To get the projection point on the Poincaré Disk boundary:

$$\text{proj_pt_PD} = \frac{\text{proj_pt}}{\|\text{proj_pt}\|}$$

Then:

$$\theta = \text{acos}(u_\alpha \cdot \text{proj_pt_PD})$$

$$d = \frac{1}{\cos(\theta)}$$

$$r_2 = \sqrt{d^2 - 1}$$

$$\text{Ctr} = du_\alpha$$

Consider the following example. Let $C = \neg A \vee \neg B$. Then $V = [-1, -1]$, $\alpha = [1, 1]$, and $u_\alpha = [0.7071, 0.7071]$. Then $\text{chop_pt} = [1, 1]$ and $\text{nei_pt} = [-1, 1]$. Let $\Delta = 0.9$, then $\text{proj_pt} = [-0.8, 1]$ and $\text{proj_pt_PD} = [-0.6247, 0.7809]$ resulting in $\theta = 1.4601$ radians (83.66 degrees), and $d = 9.0554$.

Notice that if single-literal clauses are allowed, then the center of the chop hypersphere may flip sides to satisfy circle orthogonality. If so, the feasible side of the hypersphere is the interior. Such clauses can

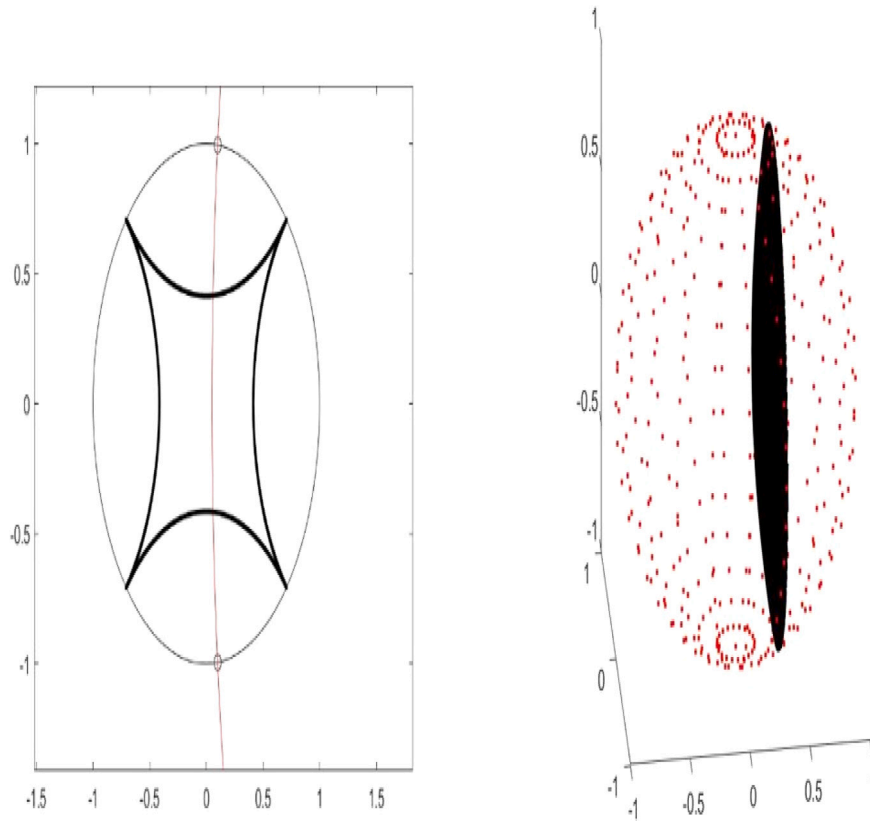


Fig. 11. Examples of Chops in 2D and 3D.

be avoided by deleting the atom of the literal and substituting its truth value into the other clause where it appears and then reducing these clauses accordingly. Fig. 11 shows example 2D and 3D chops.

Note that this formulation works in any dimension.

The Δ parameter determines how far the chop occurs from the non-solution vertexes which are being cut. Fig. 12 shows some example positions for chops. Fig. 13 shows the chops for Modus Ponens, Fig. 14 shows three edges chopped, and Fig. 15 shows a 3D face chop.

7.4. Method

Given a sentence, a proposal for solving a SAT problem is to do the following:

- A set of chops are produced for the clauses in the sentence; these chops are hyperplanes just like those used in Euclidean geometry. Note that they can also be viewed as infinite radius hyperspheres through those neighbor vertexes, however, these hyperspheres are not orthogonal to the unit disk.
- In addition to the constraint surfaces arising from the chopped vertexes, it is also necessary to bound the feasible region to be interior to the transformed unit cube. To this end, a set of face constraint hyperspheres are added; these hyperspheres are orthogonal to the unit disk.
- A Barrier Method type algorithm is developed for this constraint set which moves in the selected projection direction (i.e., maximizes the projection) using the hypersphere surfaces as barrier constraints. This is implemented as a force field method and is described in detail below. Other forces may also be introduced to ameliorate the convergence; e.g., a force away from the origin.
- A solution is considered to exist if the convergence point is close enough to a solution vertex; i.e., in the limit, the distance from the origin of the points in the sequence grows without limit.

In Euclidean geometry, software tools exist to solve linear programming problems (e.g., the Matlab function *linprog*). However, a variant was implemented here to handle the mix of hyperplane and hypersphere surfaces.

7.4.1. Barrier Method

The Barrier Method is formulated as a force field problem as described by Boyd and Vandenberg [23]. For each point $x \in F$, a barrier force is defined for each constraint surface:

$$F_i(x) = \nabla(-\log(-f_i(x))) = \frac{\nabla f_i(x)}{f_i(x)}$$

where $F_i(x)$ is the force vector at point x from the i th constraint, and $f_i(x)$ is the (minimal) distance function from x to the i th constraint surface. The projection constraint force (called the forcing direction force) is:

$$F_0(x) = -t \nabla f_0(x)$$

where $F_0(x)$ is the forcing direction force at x and $f_0(x)$ is $f^T x$ where f is the direction of the forcing vector.

These forces are based on the logarithmic (barrier) function:

$$\Phi(x) = - \sum_{i=1}^m \log(-f_i(x))$$

and the distance function for hyperplanes is:

$$f_i(x) = a_i^T x + c_i$$

and for hyperspheres:

$$f_i(x) = \|C_i - x\| - |r_i|$$

where C_i and r_i are the center and radius, respectively, of the hypersphere. Then the force field model is defined in terms of forces

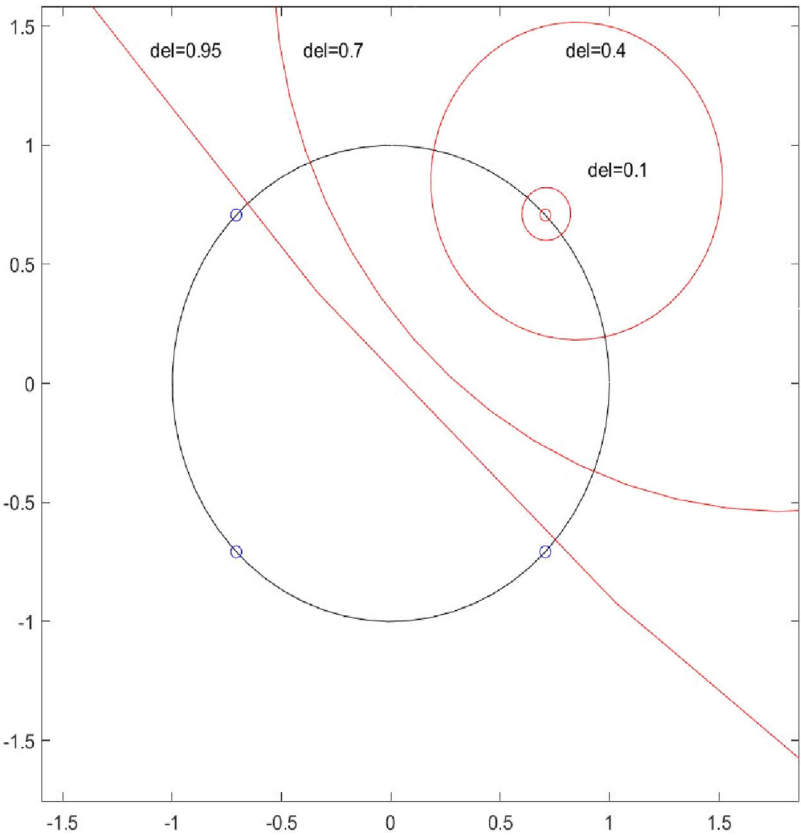


Fig. 12. The Impact of Δ on Chop Distance from Non-Solution Vertices.

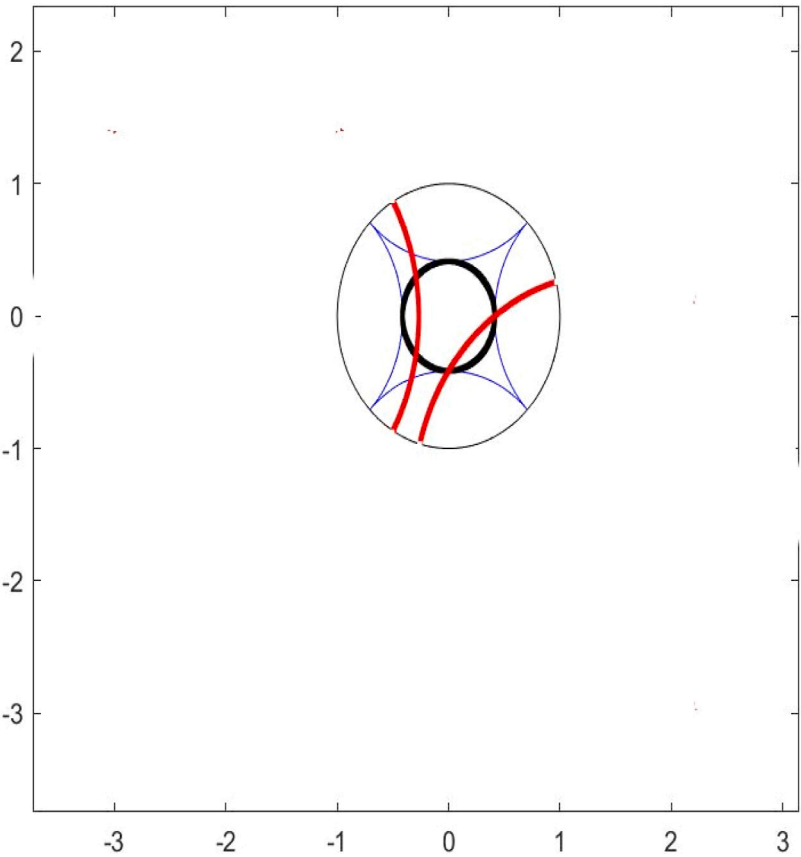


Fig. 13. Chops for Modus Ponens.

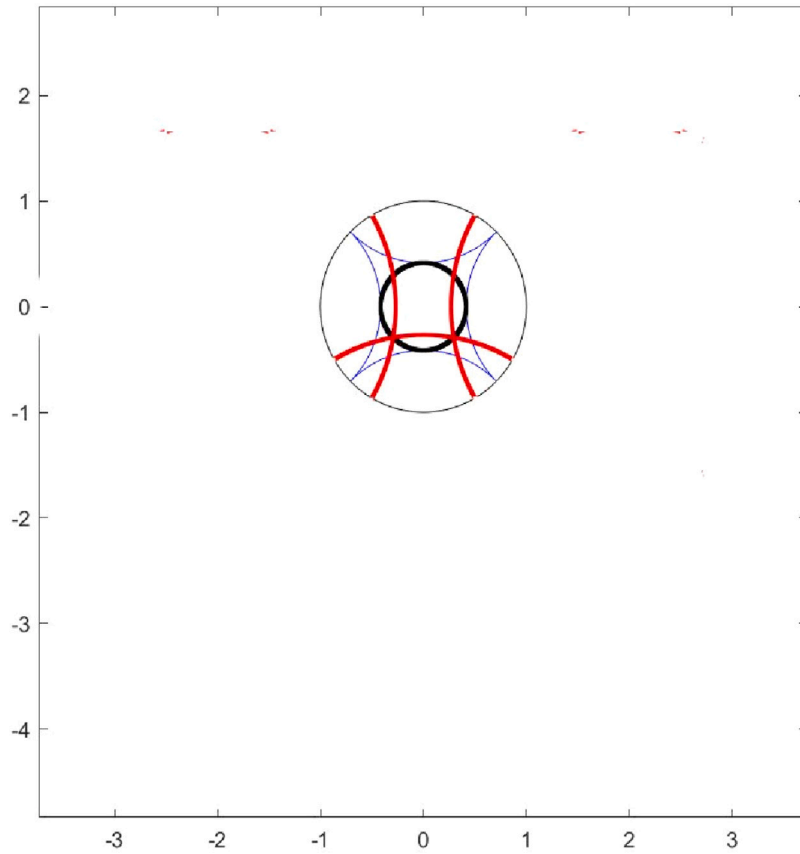


Fig. 14. Three Edges Chop.

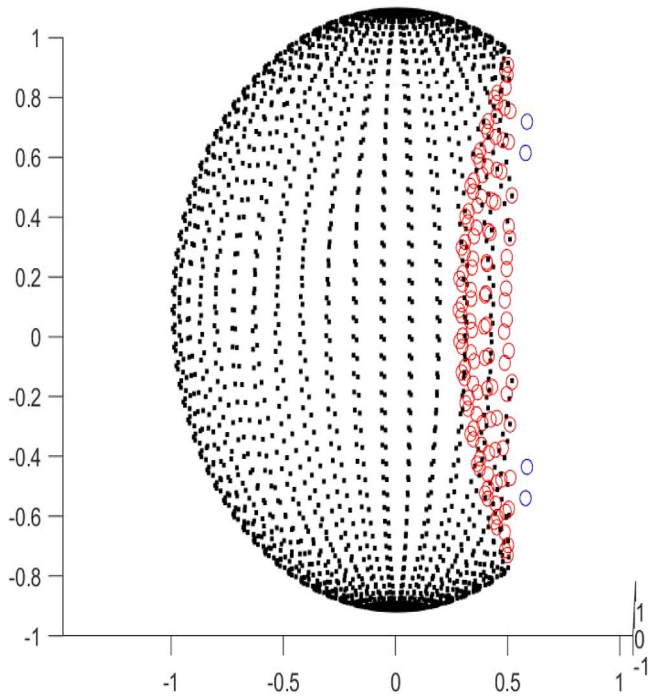


Fig. 15. 3D Face Chop.

the hyperplane forces which in our representation are:

$$F_i(x) = \frac{-a_i}{b_i - a_i^T x}$$

$$F_0(x) = tf$$

The hypersphere forces are derived as follows:

$$f_0(x) = f^T x = \sum_{i=1}^n f(i)x(i)$$

Therefore:

$$\nabla f_0(x) = \begin{bmatrix} \frac{\partial f_0}{\partial x_1} \\ \frac{\partial f_0}{\partial x_2} \\ \dots \\ \frac{\partial f_0}{\partial x_n} \end{bmatrix} = \begin{bmatrix} f(1) \\ f(2) \\ \dots \\ f(n) \end{bmatrix} = f$$

which implies that:

$$F_0(x) = tf$$

In addition:

$$f_i(x) = ((C(1) - x(1))^2 + \dots + (C(n) - x(n))^2)^{1/2} - r_i$$

which means that:

$$\frac{\partial f_i(x)}{\partial x_j} = \frac{1}{2}((C(j) - x(j))^2)^{-1/2}(2(C(j) - x(j)))(-1) = \frac{x(j) - C(j)}{\|C_i - x\|}$$

and finally:

$$\nabla f_i(x) = \frac{x - C_i}{\|C_i - x\|}$$

and

$$F_i(x) = \frac{x - C_i}{\|C_i - x\|(\|C_i - x\| - r_i)}$$

generated by the minimization impulse function (to move in a certain direction) and the repulsive force of the constraint surfaces. Boyd gives

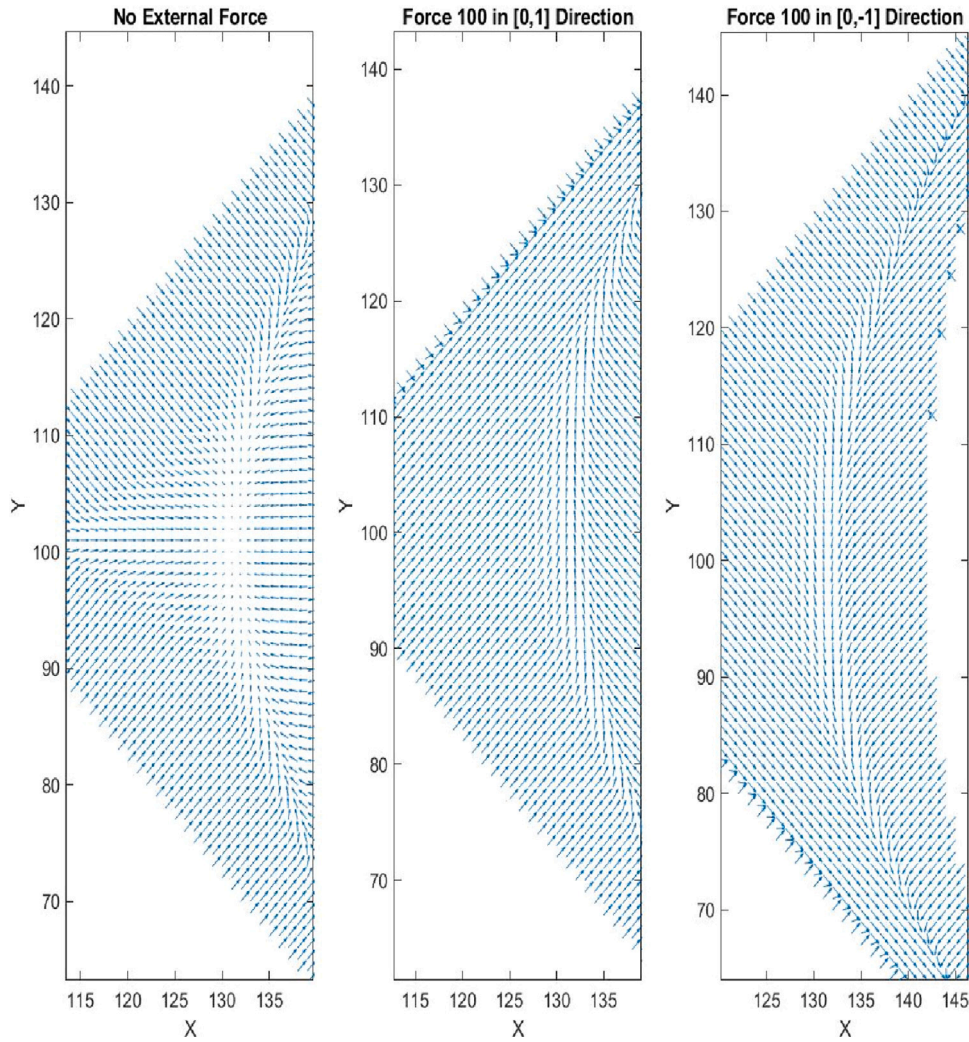


Fig. 16. Example Force Fields: Only constraint surface repulsion forces are present (left); An added upward force (middle); A downward external force (right).

In order to encourage moving toward the disk boundary, another forcing function may be defined as:

$$F_b(x) = \frac{t_b x}{\|x\|}$$

where t_b is a magnitude value.

Given $x \in F$, $t^{(0)} > 0$, $\mu > 1$, $\epsilon > 0$, then the Barrier Method is:

repeat

1. Centering step: find force equilibrium point $x^*(t)$ of $t f_0 + \Phi$
2. Update: Set x to $x^*(t)$
3. Stopping Criterion: **quit** if $\mu/t < \epsilon$
4. Increase t : Set t to μt

Fig. 16 shows the forces resulting from only constraint surfaces repulsion forces (left), an upward external force (middle), and a downward external force (right). The basic approach is to use the origin as an initial starting point since the origin is guaranteed to be in the feasible region, and find the equilibrium point when no force is applied (this corresponds to the analytic center). Next, starting from the analytic center and using a forcing direction, follow the resultant forces and move to the equilibrium point for this set of forces. Choosing different forcing directions results in an exploration of the feasible region. The problem is to determine an effective and efficient search strategy.

Fig. 17 shows the Barrier Method applied to finding solutions for a 2D problem with three solutions.

A 3-D example path is shown in Fig. 18.

8. Conclusions and future work

SAT solvers are exponential complexity (worst case) and guaranteed to solve the problem given enough time. Chop-SAT finds its answer in polynomial time, but is not guaranteed to find a SAT solution. Other PSAT solvers (e.g., Nilsson's method, logical nets, etc.) are all exponential time complexity and may rely on assumptions which invalidate the solution (e.g., max entropy) whereas Chop-SAT solves for valid atom probabilities in polynomial time.

The results of the experiments indicate that (1) this geometric approach works well for SAT problems at least up to dimension 1000, and (2) that the Chop-SAT mean is the best approximation to the actual atom probabilities provided by the Chop-SAT method performed slightly better in the decision making experiment in Wumpus World, and the analytic center method performed better than a human developed risk probability algorithm. Moreover, the non-Euclidean geometry also allows the determination of solutions, and it offers a new geometric viewpoint for seeking polynomial-time SAT algorithm.

In the future, work will be performed in order to:

- embed Chop-SAT in a general search algorithm as a hybrid method,
- test the SAT solver experiments in higher dimensions on problems which state-of-the-art SAT solvers have trouble with,
- seek effective ways to exploit the non-Euclidean geometry representation; e.g., view the feasible region as a domain to be explored

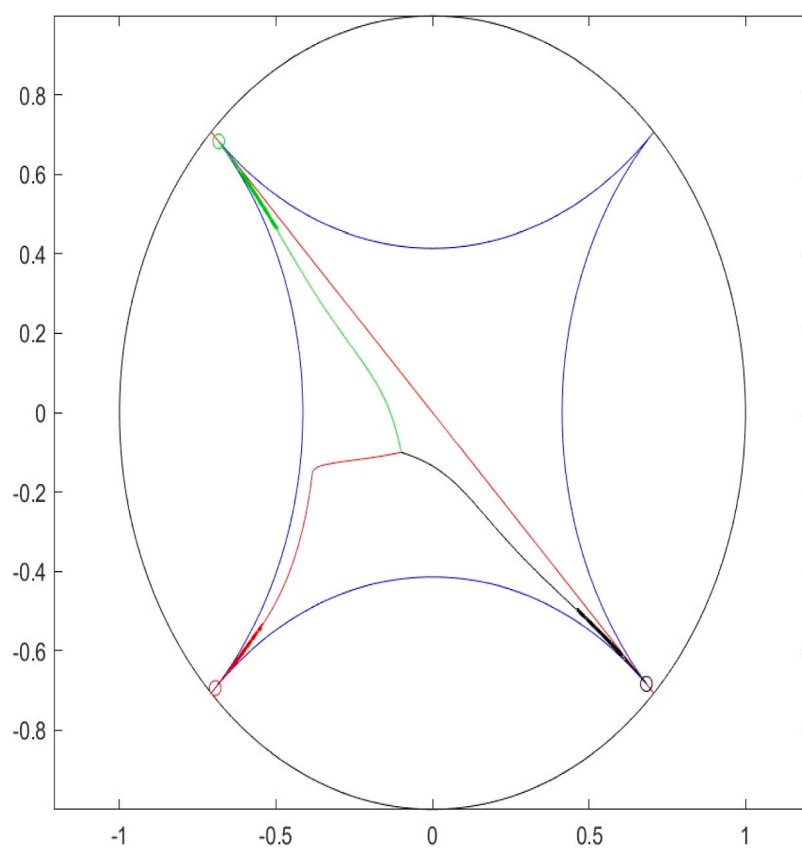


Fig. 17. The Paths for the Barrier Method finding Solutions in a 2D Problem.

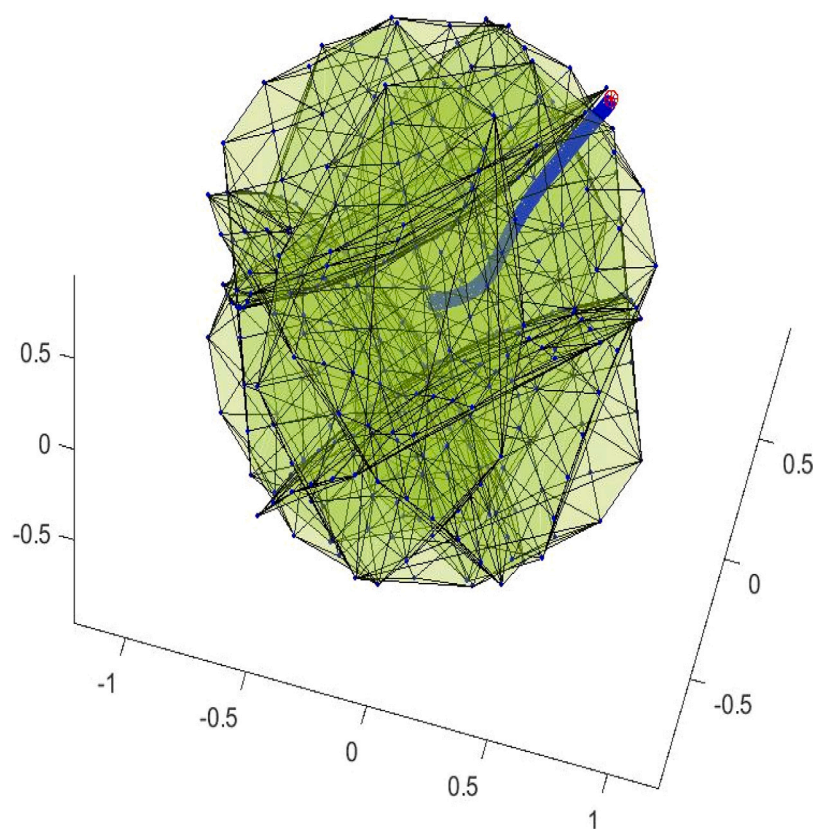


Fig. 18. The Paths for the Barrier Method finding a Solution in a 3D Problem.

by a geo-bot which has a set of range sensors to help it detect feasible points far from the Poincaré disk origin.

- use the atom probability approximation in more complex agent decision making situations (e.g., UAS traffic management) and compare its effectiveness with other methods.
- explore formal verification of the BDI method.

CRedit authorship contribution statement

Thomas C. Henderson: Writing – review & editing, Writing – original draft, Visualization, Validation, Supervision, Software, Resources, Project administration, Methodology, Investigation, Funding acquisition, Formal analysis, Conceptualization. **Amelia Lessen:** Writing – original draft, Validation, Software, Investigation. **Ishaan Rajan:** Writing – original draft, Validation, Software, Investigation. **Tessa Nishida:** Writing – original draft, Validation, Software, Investigation, Conceptualization. **Kutay Eken:** Validation, Software, Investigation. **Xiuyi Fan:** Validation, Methodology, Investigation, Formal analysis, Conceptualization. **David Sacharny:** Writing – original draft, Visualization, Validation, Methodology, Investigation, Formal analysis, Conceptualization. **Amar Mitiche:** Writing – original draft, Validation, Methodology, Investigation, Formal analysis, Conceptualization. **Thatcher Geary:** Writing – original draft, Validation, Software, Investigation, Formal analysis, Conceptualization.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgments

This work was supported in part by National Science Foundation, United States award 2152454. We would like to thank Prof. Zhang [16] for providing us with a Matlab function which produces the maximal inscribed ellipsoid of a convex polytope.

References

- [1] M. Sipser, *Introduction to the Theory of Computation*, Cengage Learning, Independence, KY, 2012.
- [2] G. Georgakopoulos, D. Kavvadias, C.H. Papadimitriou, Probabilistic satisfiability, *J. Complexity* 4 (1988) 1–11.
- [3] N. Nilsson, Probabilistic logic, *Artif. Intell. J.* 28 (1986) 71–87.
- [4] T.C. Henderson, R. Simmons, B. Serbinowski, M. Cline, D. Sacharny, X. Fan, A. Mitiche, Probabilistic sentence satisfiability: An approach to PSAT, *Artificial Intelligence* 278 (2020) 71–87.
- [5] J. Pearl, *Probabilistic Reasoning in Intelligent Systems*, Morgan Kaufmann, San Mateo, CA, 1988.
- [6] P. Domingos, D. Lowd, *Markov Logic Networks*, Morgan and Claypool Publishers, Williston, VT, 2009.
- [7] Thomas C. Henderson, Amar Mitiche, Xiuyi Fan, David Sacharny, Some explorations in SAT, Technical Report UUCS-21-016, University of Utah, 2021.
- [8] Thomas C. Henderson, David Sacharny, Amar Mitiche, Xiuyi Fan, Amelia Lessen, Ishaan Rajan, Tessa Nishida, Chop-SAT: A new approach to solving SAT and probabilistic SAT for agent knowledge bases, in: *International Conference on Agents and Artificial Intelligence*, Lisbon, Spain, 2023.
- [9] R.E. Gomory, Outline of an algorithm for integer solution to linear programs, *Bull. Am. Math. Soc.* 64 (5) (1958) 275–278.
- [10] S.R. Buss, P. Clote, Cutting Planes, Connectivity, and Threshold Logic, *Arch. Math. Log.* 35 (1996) 33–62.
- [11] V. Chvatal, Edmonds polytopes and a hierarchy of combinatorial problems, *Discrete Math.* 4 (1973) 305–337.
- [12] V. Chvatal, Cutting planes in combinatorics, *European J. Combin.* 6 (1985) 217–226.
- [13] W. Cook, C.R. Coullard, G. Turan, On the complexity of cutting-plane proofs, *Discrete Appl. Math.* 18 (1987) 25–38.
- [14] J. Devriendt, S. Gocht, E. Demirovic, J. Nordstrom, P.J. Stuckey, Cutting to the core of pseudo-boolean optimization: Combining core-guided search with cutting planes reasoning, in: *Thirty-Fifth AAAI Conference on Artificial Intelligence*, Elsevier, 2021.
- [15] Thomas C. Henderson, David Sacharny, Xiuyi Fan, Amar Mitiche, Thatcher Geary, GEO-SAT: A geometric approach to satisfiability, Technical Report UUCS-23-003, University of Utah, 2023.
- [16] Y. Zhang, On numerical solution of the maximum volume ellipsoid problem, *SIAM J. Optim.* 14 (1) (2003).
- [17] R.M. Freund, J.B. Orlin, On the complexity of four polynomial containment problems, *Math. Program.* 33 (1985) 139–145.
- [18] A.C. Moretti, A weighted projection centering method, *Comput. Appl. Math.* 22 (1) (2003) 19–36.
- [19] G. Yob, Hunt the wumpus? *Creat. Comput.* (1975).
- [20] Stuart Russell, Peter Norvig, *Artificial Intelligence: A Modern Approach*, third ed., Prentice Hall Press, Upper Saddle River, NJ, 2009, <http://dx.doi.org/10.1017/S0269888900007724>, arXiv:9809069v1.
- [21] M. Georgeff, B. Pell, M. Pollack, M. Tambe, M. Wooldridge, The belief-desire-intention model of agency, in: Jörg P. Müller, Anand S. Rao, Munindar P. Singh (Eds.), *Intelligent Agents V: Agents Theories, Architectures, and Languages*, Springer Berlin Heidelberg, Berlin, Heidelberg, 1999, pp. 1–10.
- [22] D. Sacharny, Thomas C. Henderson, Michael Cline, Benjamin Russon, Reinforcement learning at the cognitive level in a belief, desire, intention UAS agent, in: *Intelligent Autonomous Systems Conference*, Singapore, 2021.
- [23] S. Boyd, L. Vandenberghe, *Convex Optimization*, Cambridge University Press, Cambridge, UK, 2021.